EUROSTER 1310

PREPARATION: Before installing this thermostat, check your system wiring diagram. If your system is other than a low voltage heating or cooling system, please check with your local dealer. Do not connect both a Heat System and a Cool System to this thermostat.

NOTE: Leave this Manual with the homeowner for future reference.

1. Look for a location that has a constant temperature in the house and is not near the door entry or air conditioning outlet (see example on figure 1). Avoid sunny locations if possible.

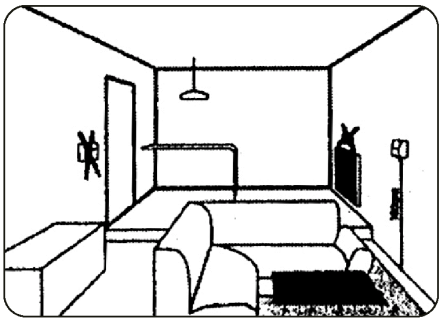

2. WARNING!!! Turn off the main power switch before installing the thermostat.
3. Release the front cover by pressing a tab on the top of the front cover with a screwdriver (see figure 2). Remove the front cover with your hand holding both sides of the cover (see figure 3).

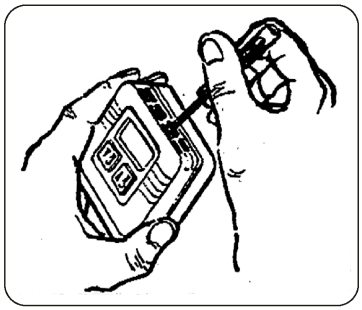

FIG. 2

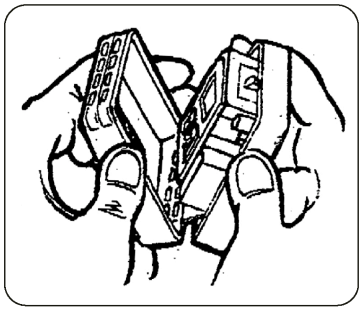

FIG. 3

4. **Remove the cover to get access to the terminals (push a small flat screwdriver into the gap from the front and** push the tab toward the center to open the cover). Pull the cover straight up (see figure 4).
5. Route the wires through the cutout in the base and mount the thermostat to the wall with two screws (see figure 5)."

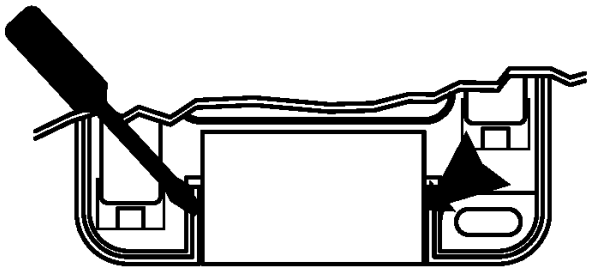

Shove screw driver into gap and push toward center to open plastic protection cover

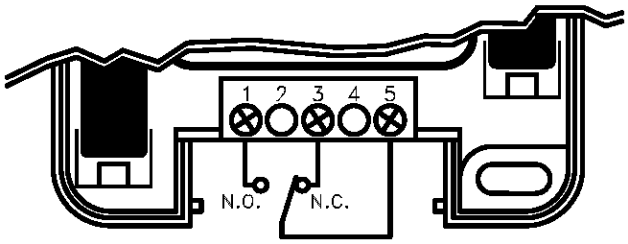

CONTACT RATING : 8A 250 V
FIG.4

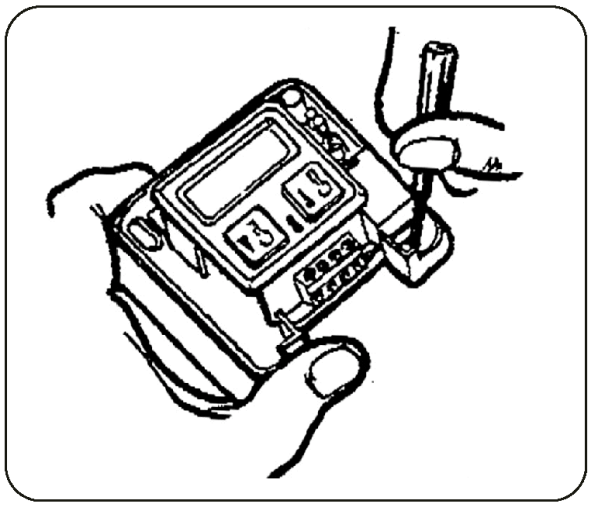

FIG. 5

6. Install the wires into the terminal block and tighten the screws (see figure 6).

Wiring Diagram (see FIG. 6)

EUROSTER 1310 FOR BATTERIES OPERATED MODEL

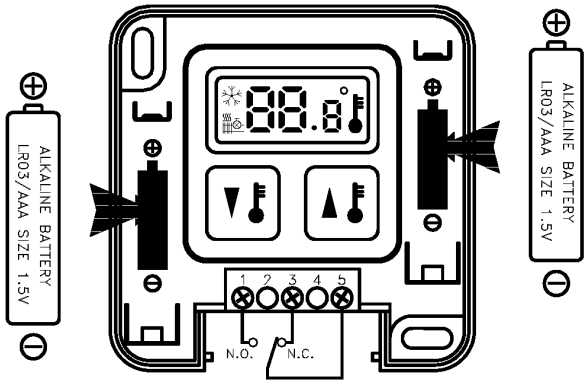

CONTACT RATING : 8A 250V
FIG. 6

Note
Terminal (1) N.O. contacts for Heating
Terminal (3) N.C. Contacts for Cooling
Terminal (5) C= Comon (one wire must be connected here)

7. Replace the terminal cover. Replace the front cover onto the base and make sure that the hooks on the base are locked with the front cover.
8. Install the two batteries

9. Turn on the main power switch for operation

Key Function:

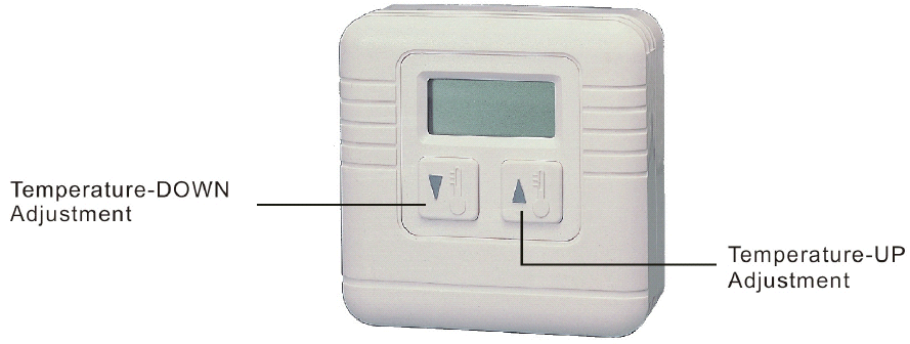

Setting & Operating

1. Press either ▼ or ▲ and LCD display will show a flashing temperature with „Heat On" symbol ( ) and „Temperatury Set" symbol ( ).
2. Press again either ▼ or ▲ to set a desired temperature. Every press on ▲ will increase 1°C and every press on ▼ will decrease 1°C.
3. When you complete setting your desired temperature, please wait for 15 seconds until the LCD display stops flashing. Then, the termostat starts to operate and the LCD display on the front panel of this unit shows room temperature with „Heat On" symbol ( ) until the temperature and then the unit will in operate to maintain the preset temperature.